
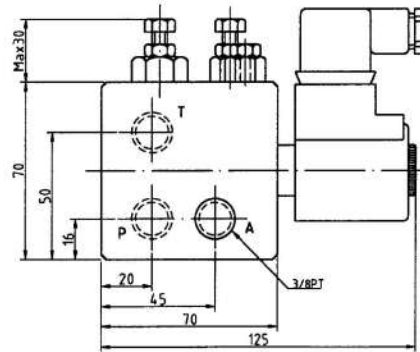



LIFT VALVES


This is a combination valve suitable for the lifters. This valve include relief valve, check valve, throttle valve and two ways no-leakage solenoid valve.

Model	Max. Pressure kg/cm ²	Max. flow rate l/min		Weight kgs	
LVS-03TR	210	20	Thread type. Cast iron body	2.8	
KVS-03TL		20	Thread type. Aluminum body	1.3	
KVS-04TL		40		1.6	
KVS-03M		20	Pump outlet mounting. Alum.body	1.0	

LVS-03 TR

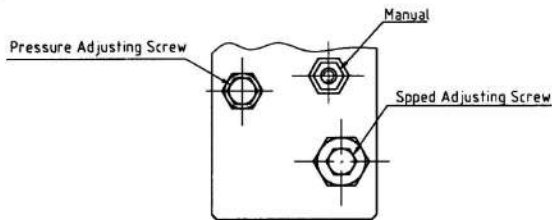

KVS-03/04 TL

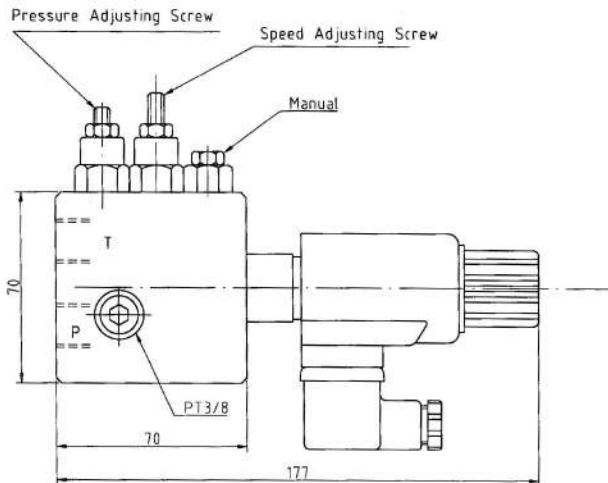

KVS-03 M

