





HYDRAULIC ACCESSARY

ROLLER CHAIN FLEXIBLE COUPLINGS



Coupling Port							Casing Port				
Model	Bore diam.		E mm	L mm	D mm	Weight kg	Model	A mm	B mm	H mm	Weight kg
	Min.	Max.									
HT-4012	11	22	80	36	35	0.8	HT-4012	75	75	61	0.3
HT-4016	15	30			50	1.4	HT-4016	92		77	0.4
HT-5016		40	100	45	60	2.6	HT-5016	111	85	96	0.6
HT-5018	19	45			70	3.5	HT-5018	122		106	0.7
HT-6018	22	55	120	54	85	6.2	HT-6018	142	106	128	1.0
HT-6022	25	75			110	9.8	HT-6022	167		152	1.2
HT-8018	30	78	150	67	115	13.9	HT-8018	186	130	170	2.3
HT-8022	35	95			140	20.2	HT-8022	220		202	2.4
HT-10020		110	201	91	160	34.0	HT-10020	248	152	228	3.2
HT-12018	48	120	261	119	170	51.0	HT-12018	305	180	252	5.6
HT-12022	58	150			210	66.0	HT-12022	355		300	7.1

SUPER FLEXIBLE COUPLINGS

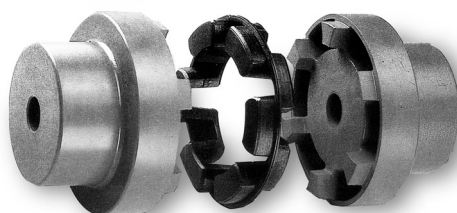

Model	Torque		Max. speed rpm	Bore diam.		D mm	OD mm	L mm	Tolerance S	Weight kg
	Normal kg-m	Max. kg-m		Min.	Max.					
NM-50	1.3	2.3	13500	7	19	33	50	25	2.0±0.5	0.48
NM-67	2.2	4.0	10000	9	28	46	67	30	2.5±0.5	1.02
NM-82	5.0	9.0	8000	10	32	53	82	40	3.0±0.5	1.88
NM-97	10.5	19.0	7000	12	42	69	97	50		3.54
NM-112	16.7	30.0	6000	14	48	79	112	60	3.5±0.5	5.40
NM-128	26.7	48.0	5000	18	55	90	128	70		8.10
NM-148	41.7	75.0	4500	22	65	107	148	80		13.50
NM-168	69.5	125.0	4000	28	75	126	170	90		19.30
NM-194	112.0	200.0	3500	32	85	140	194	100		26.30
NM-214	167.0	300.0	3000	45	95	157	214	110	4.0±0.5	35.70
NM-240	267.0	480.0	2750	60	110	179	240	120		46.70
NM-265	417.0	750.0	2500	70	120	198	265	140	5.5±0.5	66.30