



TROCHOIDAL PUMP FOR THROUGH SPINDLE SYSTEM
中心出水用齒輪泵



RBB-22 SERIES PUMP WITH MOTOR

TK-30 SERIES PUMP WITH MOTOR



GH30 SERIES PUMP WITH MOTOR



RBB-22 SERIES


- Standard with external discharge relief valve
- Pressure up to 2.5 Mpa (at 1~1.2 mm orifice)
- Cutting fluid rate 1:8




Series	Displacement (c.c/rev)	Max Pressure (Mpa)	Max Speed (rpm)	Orifice (mm)	Weight (kg)
RBB-2212HW-VD	12.0	2.5	2000	1.0	4.0
RBB-2216HW-VD	16.2		1800	1.2	4.5

RBB-22 SERIES PUMP WITH MOTOR

1HP (0.75KW-4P) RBB-2212HW-VD 220V/380V 3 Phase

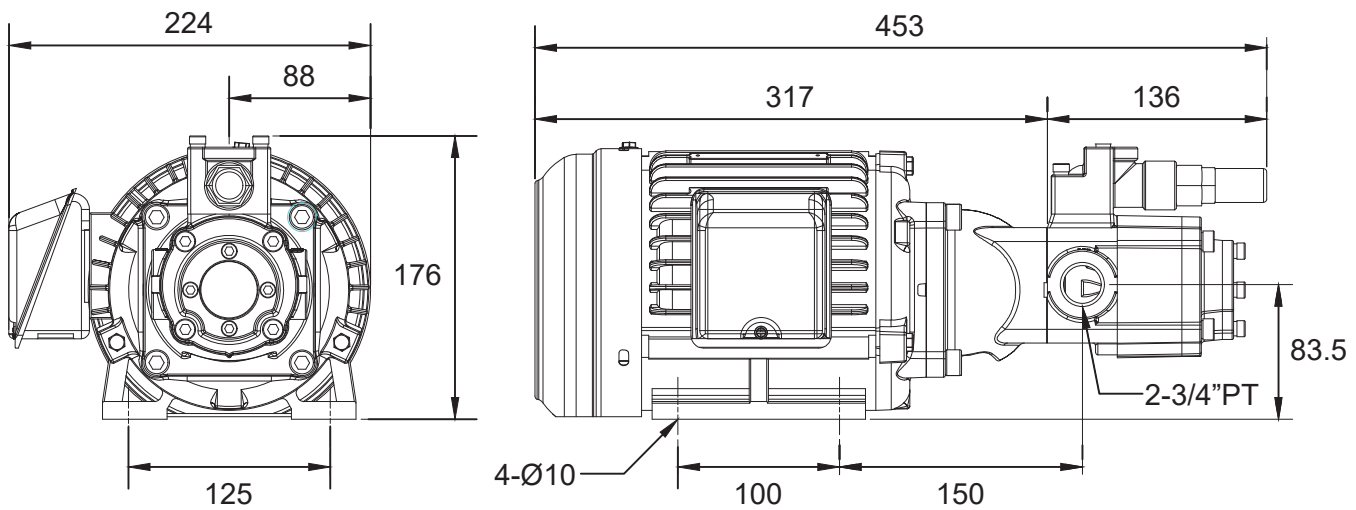

2HP (1.5KW-4P) RBB-2216HW-VD 220V/380V 3Phase

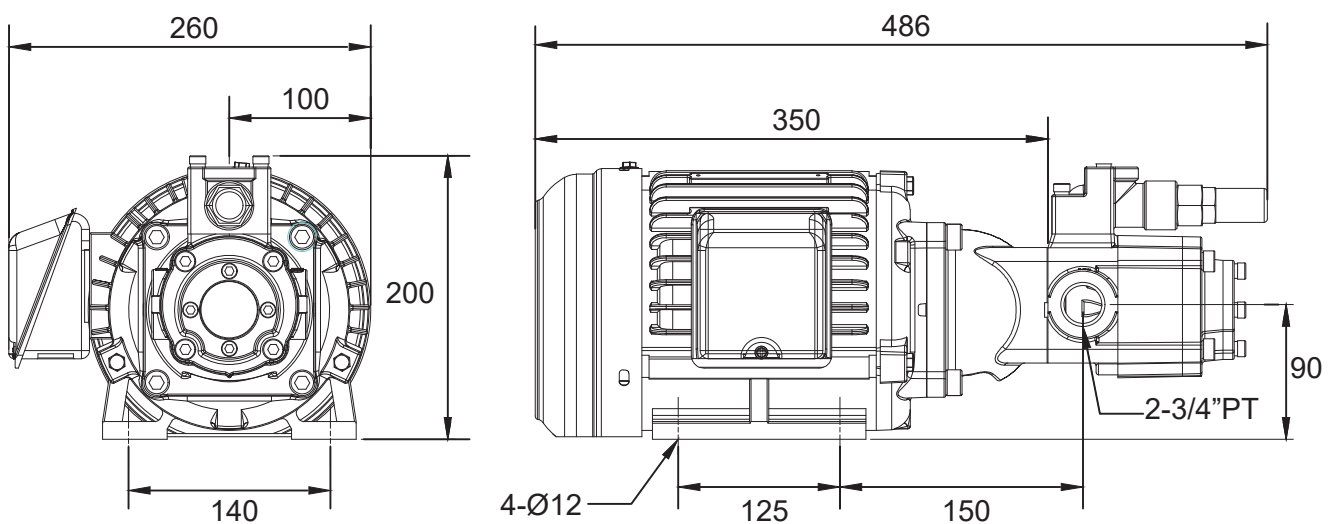

TK-30 SERIES


- Standard with external discharge relief valve
- Pressure up to 3.0 Mpa (2.8Mpa at 2.0 mm orifice)
- Cutting fluid rate 1:8



Series	Displacement (c.c/rev)	Max Pressure (Mpa)	Max Speed (rpm)	Orifice (mm)	Weight (kg)
TK-3030HW-VD	30.0	3.0	2000	1.8~2.0	7.88

TK-30 SERIES PUMP WITH MOTOR

4HP (3KW-4P) TK-3030HW-VD 220V/380V 3 Phase

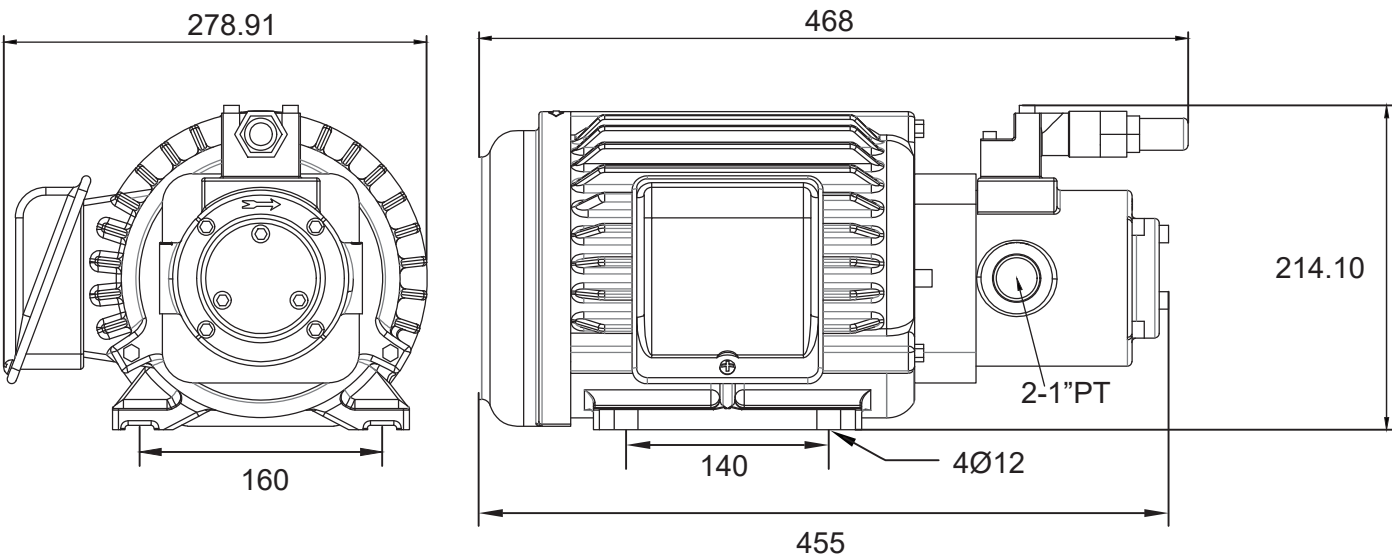

TROCHOIDAL PUMP FOR THROUGH SPINDLE SYSTEM

中心出水用齒輪泵



GH30 SERIES



- Standard with external discharge relief valve
- Pressure up to 6.0 Mpa (5.0Mpa at 2.0 mm orifice)
- Cutting fluid rate 1:8




Series	Displacement (c.c/rev)	Max Pressure (Mpa)	Max Speed (rpm)	Orifice (mm)	Weight (kg)
GH30HBMVD	19.0	6.0	1450	1.5	14.30

GH30 SERIES PUMP WITH MOTOR


5HP (3.75KW-4P) GH30HBMVD 220V/380V 3 Phase

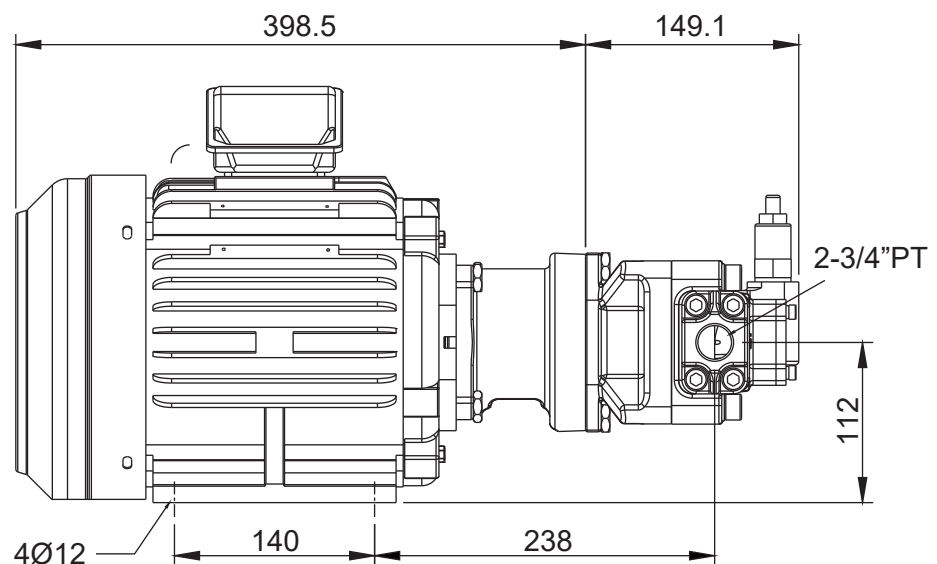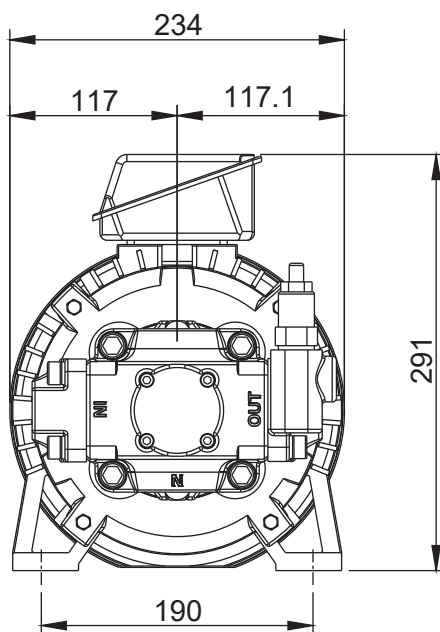


亞克力鏡面液位計 ACRYLIC LIQUID LEVEL GAUGE

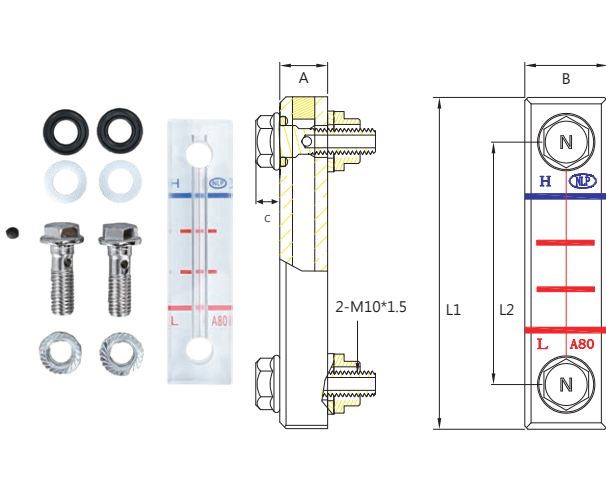


型號 Series	L1 (mm)	L2 (mm)	A (mm)	B (mm)	C (mm)	螺絲 Screw type
A-40	68	40	26	15	20	M8/M10
A-50	78	50				
A-60	88	60				
A-76	104	76				
A-80	108	80				
A-100	128	100				
A-125	153	125				M10
A-127	153	127				
A-150	178	150				
A-200	228	200				
A-300	328	300		20		

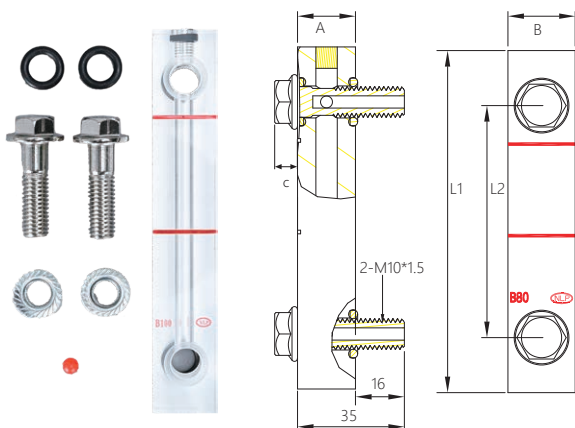

型號 Series	L1 (mm)	L2 (mm)	A (mm)	B (mm)	C (mm)	螺絲 Screw type
B-50	94	50	22	20	15	M10
B-60	94	50				
B-76	116	76				
B-80	116	80				
B-100	135	100				
B-130	164	130				
B-140	175	140				
B-150	184	150				

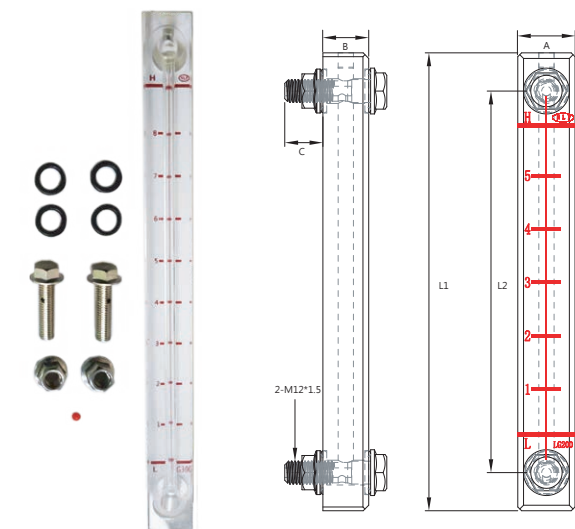

型號 Series	L1 (mm)	L2 (mm)	A (mm)	B (mm)	C (mm)	螺絲 Screw type
LG-200	240	200	30	25	20	M12
LG-300	340	300				
LG-400	440	400				




油過濾器 OIL FILTER

- 可廣泛使用於各種機械、化學工業、船舶、車輛工業等，可在運轉中的機器內進行過濾清潔
- Suitable for machinery, chemical, marine, and automotive industries; allows filtration during operation
- 無金屬網或布纖維式過濾缺失，無故障，可長久使用
- Stable and durable use life
- 可做為機械、機件管道之循環及還原裝置
- Can be a circulation device for machinery
- 清潔動作:每天轉一次，一次三到五圈
- For cleaning: Clean once a day, turn 3-5 circles each




型號 Series	Flow 流量 (L/min)		H (mm)	L (mm)	D (mm)	材質 Material	油口 Port	重量 Weight (kg)	
	60目 (Mesh)	100目 (Mesh)						手動型 Manual	電動型 Electric
D-102	20	15	160	60	50	鋅合金 Zinc Alloy	1/4" PT	0.70	-
D-103			160	75	53		3/8" PT		-
D-205	30	20	200	90	63		1/2" PT	1.24	-
D-310	40	30	230	100	73		3/4" PT	1.89	-
D-312(D)	60	40	270	120	75		1" PT	2.20	4.20
D-4113(D)	100	100	512	168	105	鋁合金 Aluminum Alloy	1-1/2" PT	6.00	6.80
D-4113H			442						-

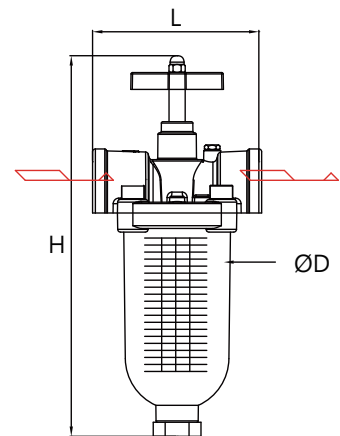


(D): 電動型 (Electric type), H: 高壓型 (High pressure type)

電動型 (Electric type) D-4113D

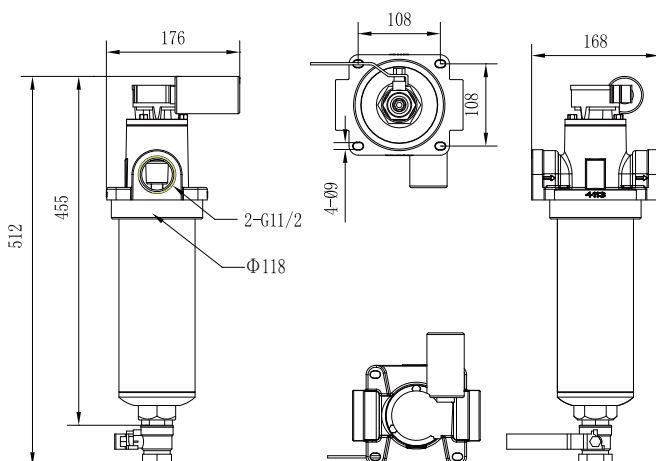

高壓型 (High pressure type) D-4113H

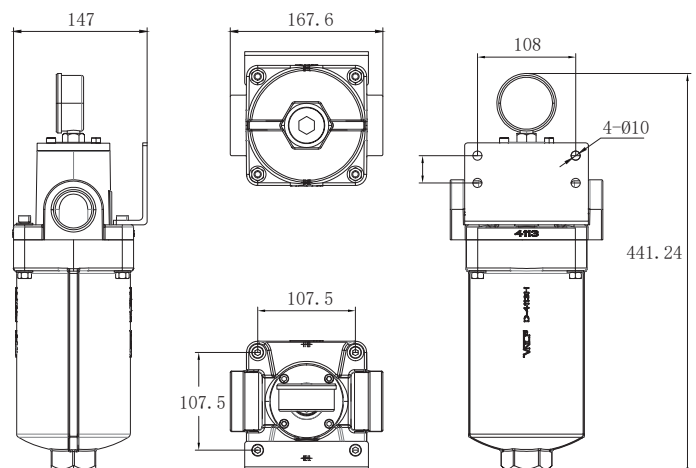

磊興有限公司

Rexpower Hydraulic & Pneumatic Co., Ltd

新北市淡水區中正東路二段27-10號7樓


7F, No.27-10, Sec.2, Zhongzheng E.Rd., Tamsui Dist, New Taipei City 25170, Taiwan

Tel: +886-2-28085136 Fax: +886-2-28086003

E-mail: sales@rexpowers.com

工廠 Tel: +886-2-26266852

<https://www.rexpowers.com/>



上海磊星機電設備有限公司

Shanghai Leixing Machinery & Electron Co., Ltd

上海市嘉定區安亭鎮園工路1188號

1188, Yuangong Road, Anting Town, Jiading District, Shanghai City 201805, China

Tel: +86-21-39120822 +86-21-39120882

